

NATIVE

idea
ceramica

Dress Your Home

Rivestimento



NATIVE

Bicottura tradizionale
Traditional double fired
Bi-cuisson traditionnelle
Zweibrandfliesen

Monocalibro / Monocaliber / Monocalibre / In einem werkmass

▼
8 mm
▲




25x75
10"x29,5"

Size Formato	SCATOLE Boxes			PALETTE Pallets		
	Pz	m ²	Kg	Box	m ²	Kg
Cm 25x75						
FONDI 25X75	8	1,50	20,50	45	67,50	922,50
BLOCKS	8	1,50	20,50	45	67,50	922,50
WALLBRICK	8	1,50	20,50	45	67,50	922,50
OASI [A+B]	8	1,50	20,50	-	-	-
MOSAICO 30x30	5	-	6	-	-	-
Stick BLITZ 1x75	8	-	0,70	-	-	-

Imballi / Pes
[Packaging / Weights]



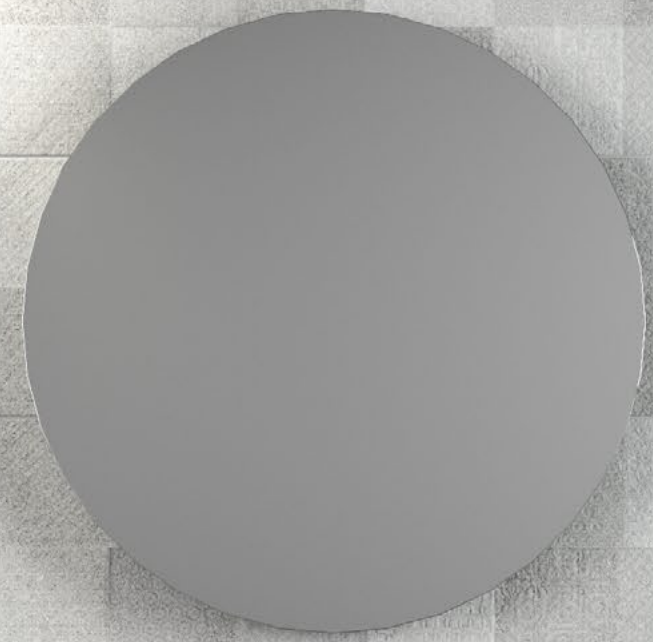

Blocks Grigio

OAK/ Dark

Wall Brick Grigio

Blocks Grigio



OAK/ White




Wall Brick Beige



Blocks Beige

Native

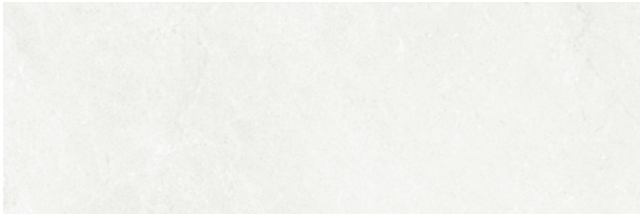


INVR01 - NATIVE - GHIACCIO / 25x75 66



INVR06 - BLOCKS - BEIGE / 25x75 71



INVR04 - WALLBRICK - BEIGE / 25x75 71

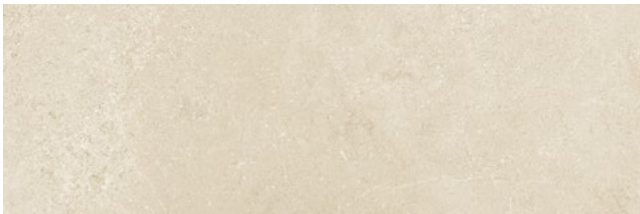


INVR02 - NATIVE - BEIGE / 25x75 66




UR014 Stick BLITZ BRONZO / 1x74,8 28



INVR08 - COMP - OASI [A+B] / 25x75 130

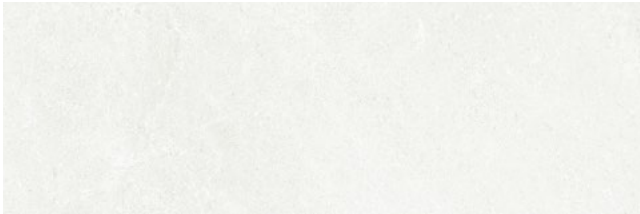


INVR01 - NATIVE - GHIACCIO / 25x75 66

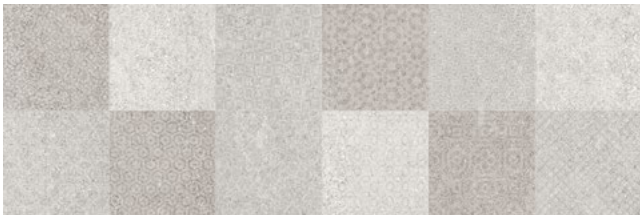

INVR07 - BLOCKS - GRIGIO / 25x75 71



INVR05 - WALLBRICK - GRIGIO / 25x75 71

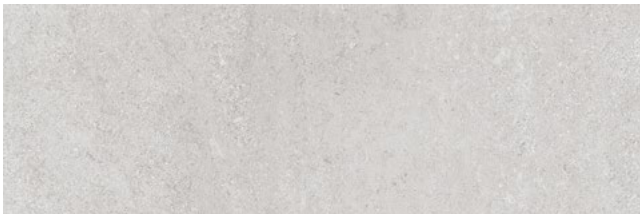


INVR03 - NATIVE - GRIGIO / 25x75 66



UR015 Stick BLITZ SILVER / 1x74,8 28



INVM01 - MOS.NATIVE MIX BEIGE / 30x30 25

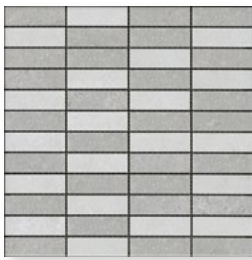

INVM02 - MOS.NATIVE MIX GRIGIO / 30x30 25



B

A

Cod. *NB: prezzo per scatola completa.
*NB: price per full box.



8 pz.



OAK / Blonde

CARATTERISTICHE TECNICHE

Technical features
Caractéristiques techniques
Technische Eigenschaften

PAVIMENTO

Floor tile

RIVESTIMENTO

Wall tile



	Metodo di prova	Valori prescritti	Valori prescritti	Valori medi
	Testing method Méthode d'essai Prüfmethode	International Standard Internationale Normwerte Valeurs Prescrites	International Standard Internationale Normwerte Valeurs Prescrites	Average Value Mittelwert Valeurs Moyennes
 Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme	ISO 10545 - 3	≤ 0,5 %	> 10 %	Conforme In accordance Entsprechend
 Lunghezza e larghezza Length and width Longueur et largeur Länge und Breite	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	Conforme In accordance Entsprechend
 Spessore Thickness Épaisseur Stärke	ISO 10545 - 2	+/- 5 %	+/- 10 %	Conforme In accordance Entsprechend
 Rettilineità degli spigoli Straightness Equerrage des angles Geradlinigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,3 %	Conforme In accordance Entsprechend
 Ortogonalità Rectangularity Orthogonalité Rechtwinkligkeit	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	Conforme In accordance Entsprechend
 Planarità Warpage Planéité Ebenflächigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,5 % - 0,3%	Conforme In accordance Entsprechend
 Coefficiente di attrito (scivolosità) Friction coefficient (slipperiness) Coefficient de friction (glissement) Reibungskoeffizient (Schlupfrigkeit)				
 Coefficiente dilatazione termica lineare Coefficient of linear thermal-expansion Coefficient de dilatation thermique linéaire Lineare Wärmeausdehnung	ISO 10545 - 8	9 MK ¹		7 MK¹
 Resistenza alla flessione Flexion resistance Résistance à la flexion Biegezugfestigkeit	ISO 10545 - 4	> 35 N/mm ²	> 15 N/mm ²	Conforme In accordance Entsprechend
 Resistenza all'abrasione profonda Deep abrasion resistance Résistance à l'abrasion profonde Beständigkeit gegen Tiefenabrieb				
 Resistenza al gelo Frost resistance Résistance au gel Frostwiderstandsfähigkeit	ISO 10545 - 12	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
 Resistenza agli sbalzi termici Thermal shock resistance Résistance aux écarts de température Temperaturwechselbeständigkeit	ISO 10545 - 9	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
 Resistenza dei colori alla luce Color resistance to light Résistance de la couleur à la lumière Lichtbeständigkeit	DIN 51094	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
 Resistenza ai prodotti chimici Chemical resistance Résistance aux produits chimiques Chemikalienfestigkeit	ISO 10545 - 13	Classe UB min	Classe GB min	Conforme In accordance Entsprechend
 Resistenza alle macchie Stain resistance Résistance aux taches Flecken-Beständigkeit	ISO 10545 - 14	Classe 3 min	Classe 3 min	Conforme In accordance Entsprechend

UNI EN 14411 G
Gruppo BIa GL

Pavimenti in gres porcellanato
Porcelain wall and floor tiles

UNI EN 14411 L
Gruppo BIII GL

Rivestimenti in bicottura
Double firing wall tiles

Azienda
Company



idea ceramica // by MoMa ceramiche Group



We are here!
Noi siamo qui!

Finale Emila (MO) - Via Panaria Bassa 17/A - Italy

Tel. +39 0535 90401 / info@ideaceramica.biz

www.ideaceramica.net

A detailed botanical illustration of various tropical plants, including large palm fronds with distinct horizontal stripes and several bird-of-paradise flowers with long, elegant spurs. The style is painterly and naturalistic, with a muted color palette of greens, browns, and blues.

idea ceramica

Via Panaria Bassa 17/A
41034 Finale Emilia (MO)

Tel. +39 0535 90401
Fax. +39 0535 762368

MADE IN ITALY

info@ideaceramica.biz

www.ideaceramica.net